Product Specification

Code: FB149

SPECIFICATION	
LID SIZE:	150mm x 150mm x 20mm
LID STYLE:	Surface bevelled edge - Solid Stainless
LID MATERIAL:	Stainless 304
BOX SIZE:	135mm x 130mm x 100mm deep
BOX MATERIAL:	Compact brass and stainless
CAPACITY (POWER):	1 x Standard Double Socket Outlet
SUPPLIED WITH:	1 x Standard Double Socket Outlet 1 x 3-Gang Architrave Data Plate
FEATURES:	Soft closed lid. Cable shield framed assembly to prevent cables being cut. Robust and large capacity cable exit flap with retracing handle. Modular box body and lid design, interchangeable with other lids in the ECD floor box range. Ployamide lids in the ECD floorbox range. Option to fit cam lock.

FB149 Assembly

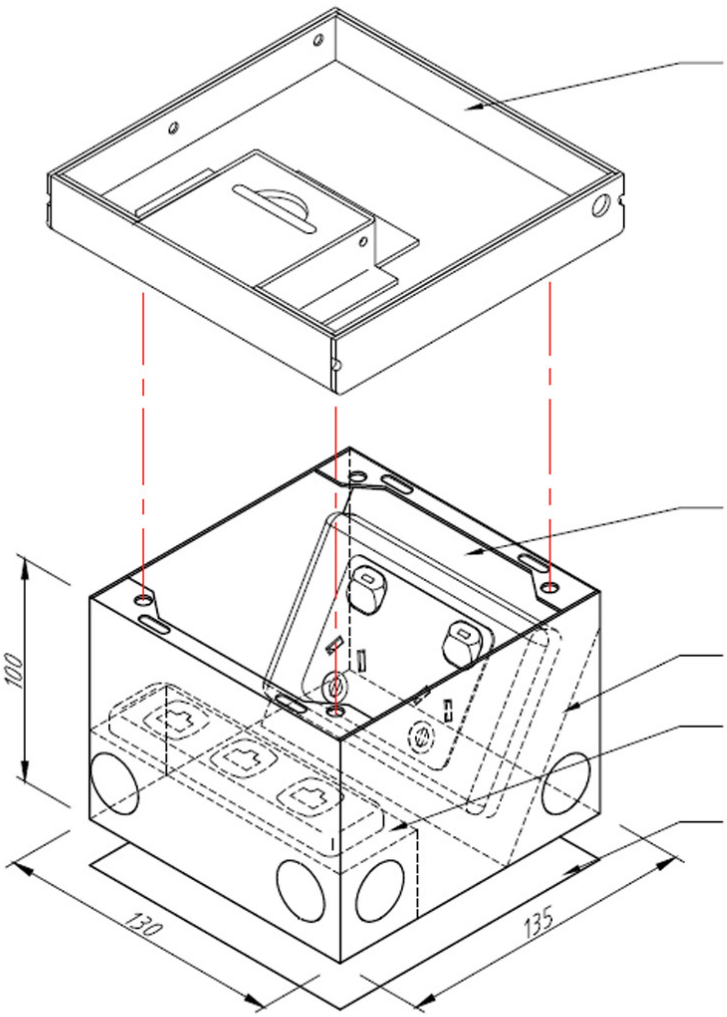

Stainless steel lid and frame
Assembly with 20mm deep recess,
cable exit flap, dust guard and
lifting loop (150 x 150 x 255mm O/A)

Powder coated steel body
130 x 135 x 100mm deep (Nom.) with
10 No. 25Ø conduit knockouta
(2 to each side and 2 on base)

Outlet mounting bracket to suit
1 No. standard power outlet plate

Outlet mounting bracket to suit
1 No. 3 gang architrave plate for data / A.V

Nominal recess size:
150 x 150 x130 deep for timber floor or
175 175 130 foam blockout for concrete

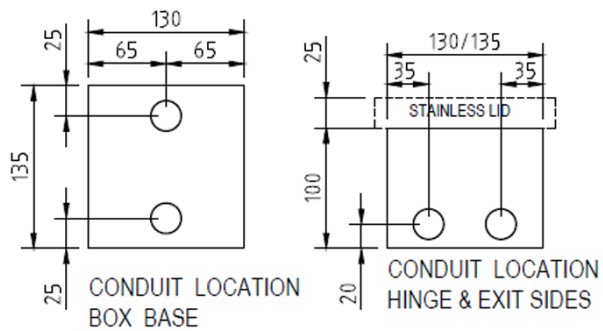

All dimension quoted are nominal only. Drawings, images and text for illustrative purposes only and product details and dimensions are subject to change without notice.

This product is not suitable for use in wet areas, is intended for use with fixed wiring only and must be installed by a licensed electrical mechanic in accordance with AS 3000, SAA wiring rules and A.C.M.A requirements.

All dimension quoted are nominal only. Drawings, images and text are for illustrative purposes only and product details and dimensions are subject to change without notice.

This product is not suitable for use in wet areas. It is intended for use with fixed wiring only and must be installed according to the AS/NZ 3000 Wiring Rules.