Cablerein

Product Specification
Code: FB4SR

SPECIFICATION	
LID SIZE:	266mm x 266mm
LID STYLE:	Surface bevelled edge - Solid Stainless
LID MATERIAL:	Stainless 304
BOX SIZE:	240mm x 240mm x 110mm diameter
BOX MATERIAL:	Deep rebate stainless
CAPACITY (POWER):	2 x Standard Double Socket Outlets 2 x Standard Double Data Plates
SUPPLIED WITH:	2 x Standard Double Socket Outlets 2 x Standard Double Data Plates Temporary Construction Lid
SUITABLE FOR:	Category 6A & 7A Cabling
FEATURES:	Soft closed lid. Cable shield framed assembly to prevent cables being cut. Robust and large capacity cable exit flap with retracing handle. Modular box body and lid design, interchangeable with other lids in the ECD floor box range. Ployamide lids in the ECD floorbox range. Option to fit cam lock.

FB4SR Assembly

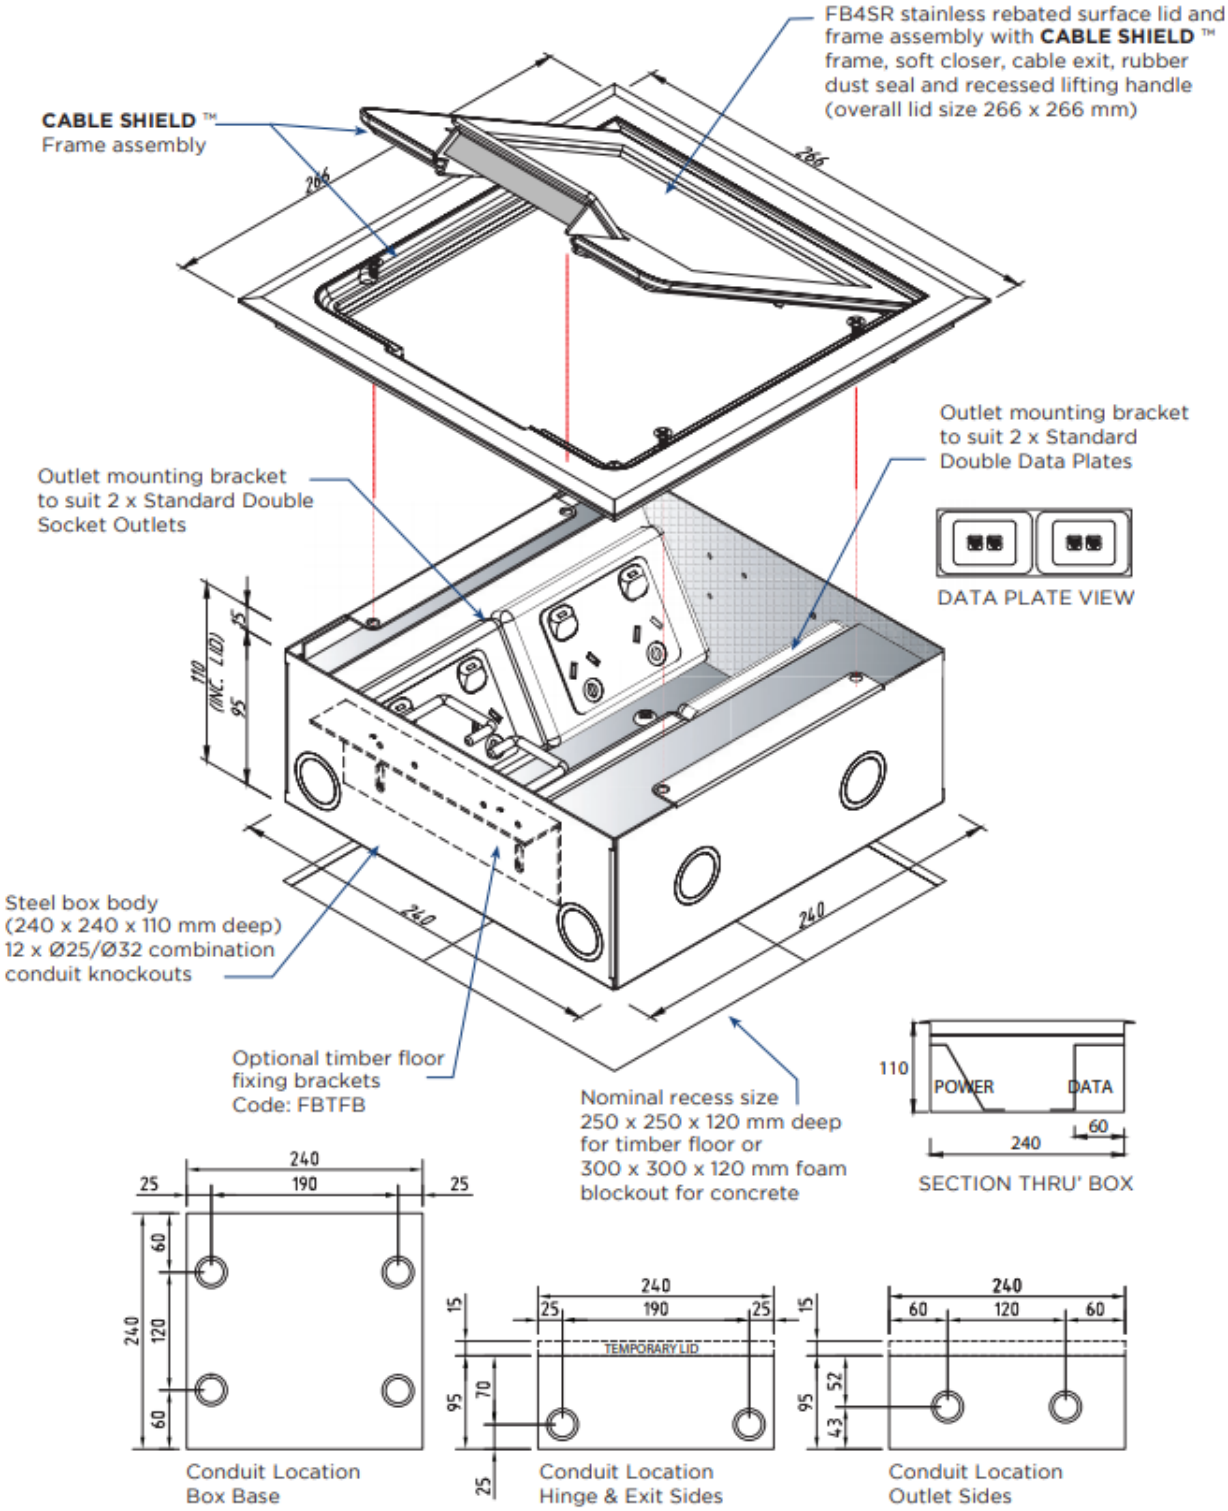

All dimension quoted are nominal only. Drawings, images and text are for illustrative purposes only and product details and dimensions are subject to change without notice.

This product is not suitable for use in wet areas. It is intended for use with fixed wiring only and must be installed according to the AS/NZ 3000 Wiring Rules.