


LED PANEL SERIES


Light Nation's range of panels has been designed for users looking for high quality light output. A variety of dimming options with reputable driver brands ensures a solution suitable for your project.



**600 X 600 MM
PANEL**

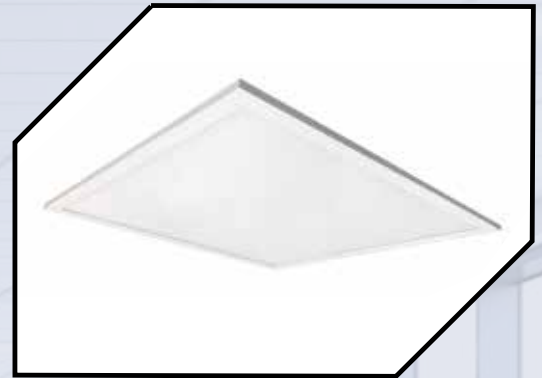

**1200 X 300 MM
PANEL**

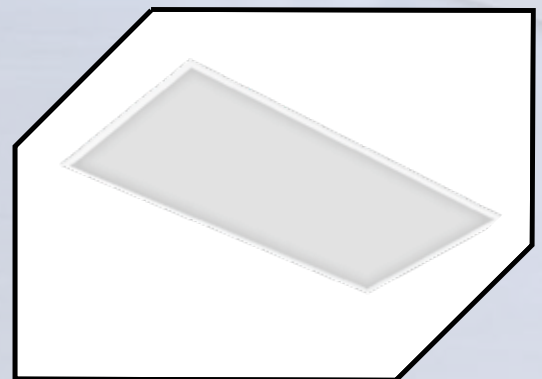

**1200 X 600 MM
PANEL**



PANELS

600×600MM PANEL

CODE	DRIVER	DRIVER LIFESPAN	DIMMING
LNP664	Boke	50,000hrs	Non-Dimmable
LNP664PD	Boke	50,000hrs	Phase Dimmable / 1-10V Dimmable
LNP664T	Tridonic	100,000hrs	Non-Dimmable
LNP664D	Tridonic	100,000hrs	DALI Dimmable

INFORMATION

WATTAGE
36W

COLOUR TEMP
4000K

LUMEN OUTPUT
3600lm

IK RATING
IK05

PROTECTION RATING
IP40

UGR RATING
UGR≥19

BEAM ANGLE
90°

EFFICACY
100lm/W

LIFETIME RATING
L70B10

INPUT VOLTAGE
220-240V

LED LIFETIME
50,000hrs

CRI
90

WARRANTY
5 Year


FITTING COLOUR
White

MACADAM ELLIPSE RATING
SDCM<3

ACCESSORIES



LN Panel Surface Kit
600×600MM

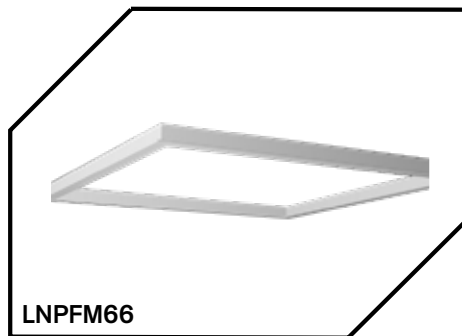

LN Panel Flush Kit
600×600MM



LN Panel Suspension Kit
1.2M



PANELS

1200X300MM PANEL

CODE	DRIVER	DRIVER LIFESPAN	DIMMING
LNP1234	Boke	50,000hrs	Non-Dimmable
LNP1234PD	Boke	50,000hrs	Phase Dimmable / 1-10V Dimmable
LNP1234T	Tridonic	100,000hrs	Non-Dimmable
LNP1234D	Tridonic	100,000hrs	DALI Dimmable

INFORMATION

WATTAGE

36W

COLOUR TEMP

4000K

LUMEN OUTPUT

3600lm

IK RATING

IK05

PROTECTION RATING

IP40

UGR RATING

UGR \geq 19

BEAM ANGLE

90°

EFFICACY

100lm/W

LIFETIME RATING

L70B10

INPUT VOLTAGE

220-240V

LED LIFETIME

50,000hrs

CRI

90

WARRANTY

5 Year


FITTING COLOUR

White


MACADAM ELLIPSE RATING

SDCM<3


ACCESSORIES

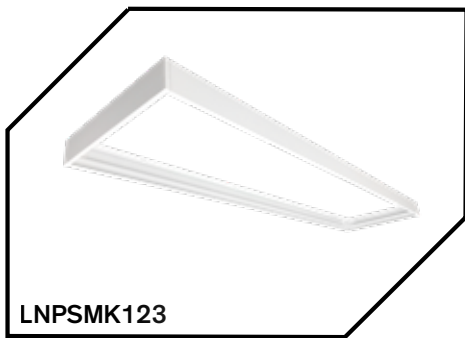

LN Panel Surface Kit
1200x300MM

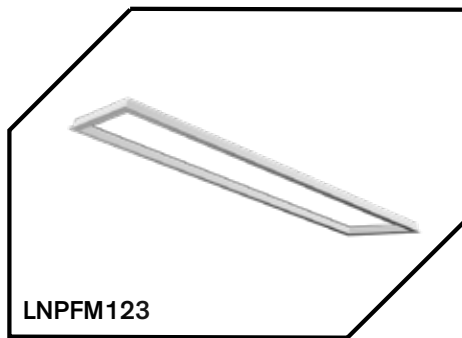

LN Panel Flush Kit
1200x300MM

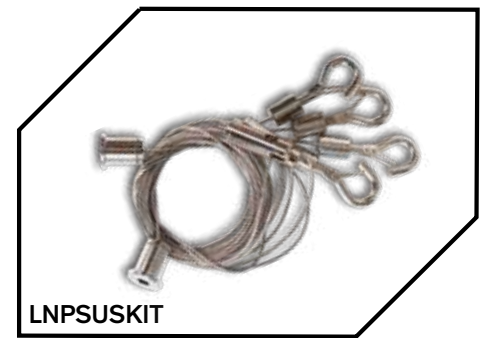


LN Panel Suspension Kit
1.2M

PANELS

1200X600MM PANEL

CODE	DRIVER	DRIVER LIFESPAN	DIMMING
LNP1264	Boke	50,000hrs	Non-Dimmable
LNP1264PD	Boke	50,000hrs	Phase Dimmable / 1-10V Dimmable
LNP1264T	Tridonic	100,000hrs	Non-Dimmable
LNP1264D	Tridonic	100,000hrs	DALI Dimmable

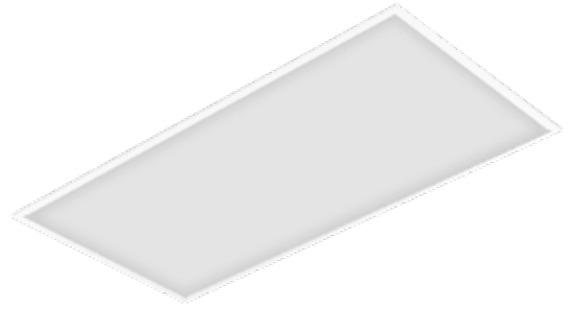

INFORMATION

WATTAGE

50W

COLOUR TEMP

4000K

LUMEN OUTPUT

5000lm

IK RATING

IK05

PROTECTION RATING

IP40

UGR RATING

UGR \geq 19

BEAM ANGLE

90°

EFFICACY

100lm/W

LIFETIME RATING

L70B10

INPUT VOLTAGE

220-240V

LED LIFETIME

50,000hrs

CRI

90

WARRANTY

5 Year


FITTING COLOUR

White


MACADAM ELLIPSE RATING

SDCM<3


ACCESSORIES

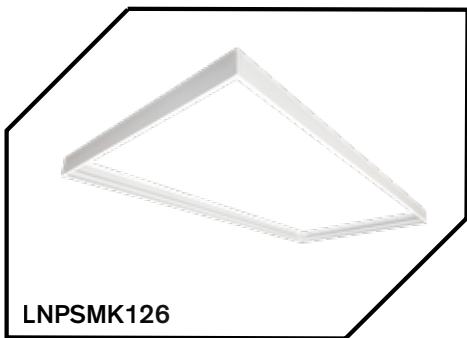

LN Panel Surface Kit
1200x600MM

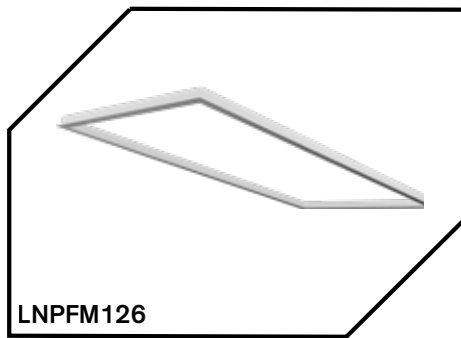

LN Panel Flush Kit
1200x600MM

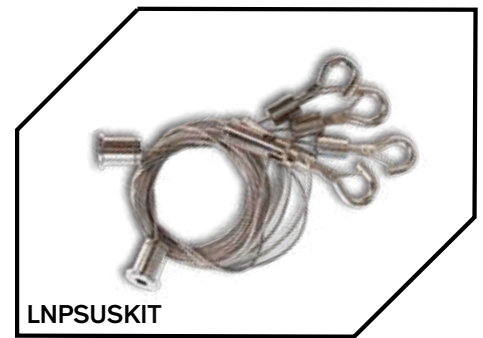

LN Panel Suspension Kit
1.2M