




Product Specification

Code: FFD SERIES

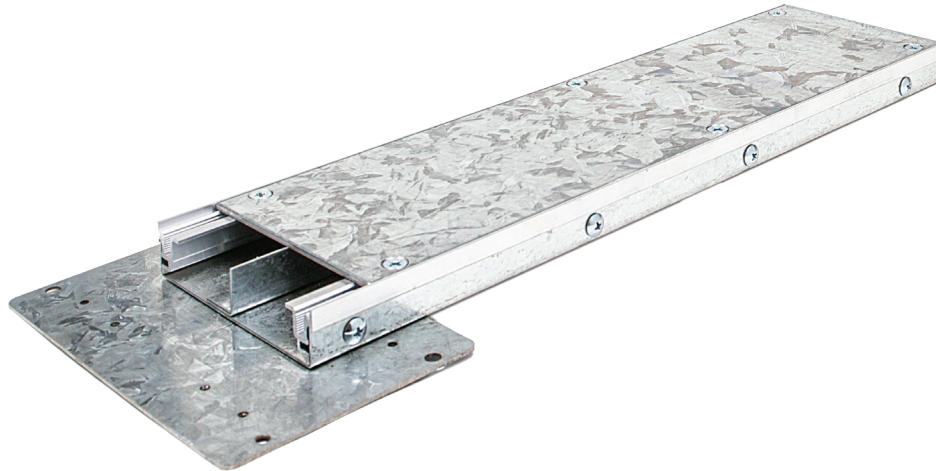

| STANDARD SIZE RANGE | | | ACCESSORIES |
|---------------------|-----------------|-------------|---------------------------------|
| CODE | DUCT SIZE (WxD) | RECESS SIZE | |
| FFD 115/35 | 115 x 35 mm | 190 x 45 mm | Crossover Junction Tee Junction |
| FFD 225/35 | 225 x 35 mm | 300 x 45 mm | 90° Bend |
| FFD 225/50 | 225 x 50 mm | 300 x 60 mm | Access Ports |
| FFD 350/65 | 350 x 65 mm | 420 x 75 mm | Stop Ends Above Floor Boxes |

- Fully accessible system suitable for commercial and light industrial applications.
- Galvanised steel duct body with Aluminium edge trims
- Removable screw fixed galvanised steel covers. Covers are pre-punched and countersunk.
- Supplied with levelling / joining brackets pre-fitted to duct body.
- Levelling / joining brackets provide facility to adjust duct height during installation.
- A full range of flush floor cross-over and tee junction boxes are available.
- Available with lid trim to suit vinyl floor.
- Suits PDC floor boxes.

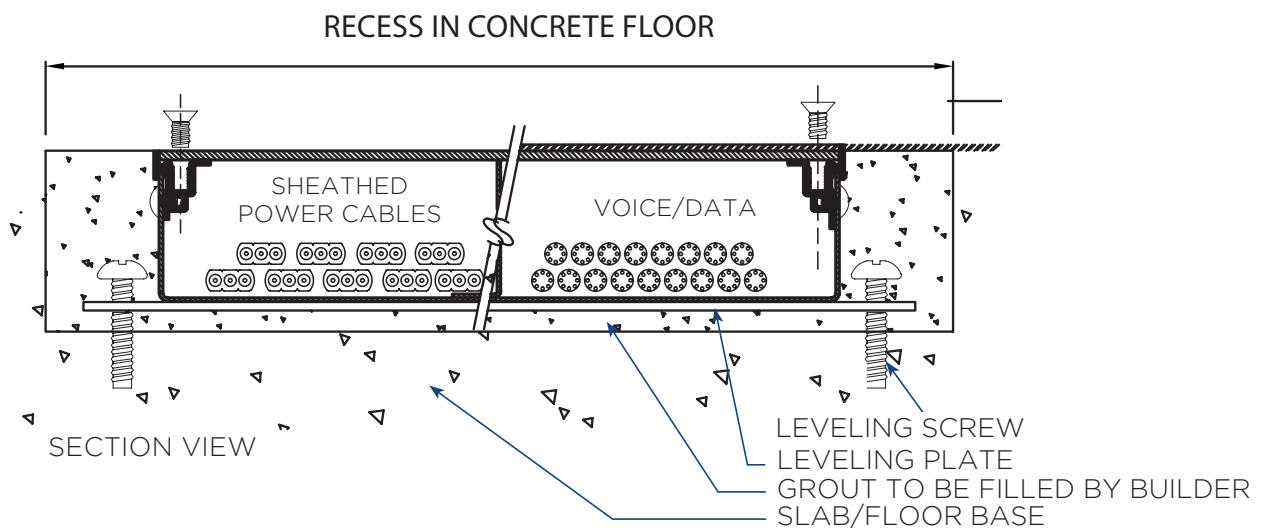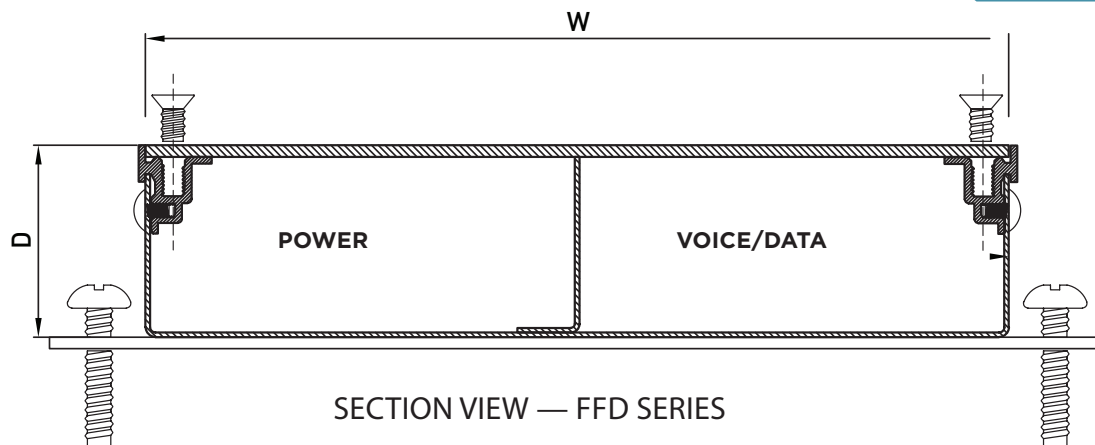

INSTALLATION FFD SERIES:

- Installed into a preformed recess provided by the builder. Once duct is installed and levelled to floor level, the builder is required to grout the location.

SUGGESTED SPECIFICATION:

- The contractor shall allow to supply and install PDC Cat No. FFD (see front page), Flush Floor Duct System, generally in accordance with the manufacturers technical publication and as identified on the plans and specifications of the project.
- The body shall be folded steel with aluminium trim with removable pre-punched and countersunk, galvanised steel covers.
- The system shall be a complete and workable system including levelling bracket, stop ends, access inspection ports, and floor outlet boxes.